

Smart Module

Monocrystalline PERC Module with Half-Cut Cell Technology and Integrated Power Optimizer

SPV355-R60DBMG, SPV360-R60DBMG, SPV370-R60DBMG

SMART MODULE



PV to grid solution including full service from SolarEdge

- Easy installation with module pre-assembled power optimizer
- Optimized energy output by constantly tracking the maximum power point (MPPT) of each module individually
- Module-level voltage shutdown for installer and firefighter safety
- Full visibility of system performance from module to grid
- Superior quality control with full automatic production line
- Excellent mechanical loading and shock resistance performance
- Elegant design with an all-black module
- 25 years module warranty and performance warranty
- Specifically designed to work with SolarEdge inverters

Smart Module

Monocrystalline PERC Module with Half-Cut Cell Technology and Integrated Power Optimizer

SPV355-R60DBMG, SPV360-R60DBMG, SPV370-R60DBMG

MODULE ELECTRICAL PROPERTIES

Applicable to SPV with P/N


	SPV355-R60DBMG-6M4Cxx	SPV360-R60DBMG-6M4C	SPV370-R60DBMG-6M4Cxx	
STC⁽¹⁾				
Module Power	355	360	370	W
Max. Power Voltage (V _{mp})	33.74	33.87	34.17	V
Max. Power Current (I _{mp})	10.53	10.63	10.83	A
Open Circuit Voltage (V _{oc})	41.51	41.66	41.96	V
Short Circuit Current (I _{sc})	10.96	11.07	11.29	A
Maximum System Voltage		1000		V _{dc}
Maximum Series Fuse Rating		20		A
Module Efficiency	19.0	19.27	20.31	%
Power Measurement Tolerance		0 ~ +5		W
NOCT⁽²⁾				
Module Power	266	270	277	W
Max. Power Voltage (V _{mp})	30.97	31.09	31.37	V
Max. Power Current (I _{mp})	8.59	8.67	8.84	A
Open Circuit Voltage (V _{oc})	38.66	38.80	39.08	V
Short Circuit Current (I _{sc})	9.01	9.10	9.28	A

MODULE MECHANICAL PROPERTIES

Cells	120 (6 x 20)	
Cell Type	Monocrystalline PERC	
Cell Dimensions	166 x 83	mm
Dimensions (L x W x H)	1755 x 1038 x 40*	mm
Front Side Maximum Load (Snow)	5400	Pa
Rear Side Maximum Load (Wind)	2400	Pa
Weight (with Power Optimizer)	22*	kg
Front Glass	3.2mm, coated tempered glass	
Frame	Black anodized aluminum	
Junction Box	IP68, three diodes	
Connector Type	Staubli MC4	
Operating Temperature	-40 to +85	°C
Packaging Information (units per pallet)	26	

* The dimensions and weight displayed in this table apply to modules manufactured from February 2021.

Modules manufactured prior to February 2021 (SPVxxx-R60DBMG-2C01) have dimensions of 1776 x 1052 x 40 mm and weigh 23.0 kg

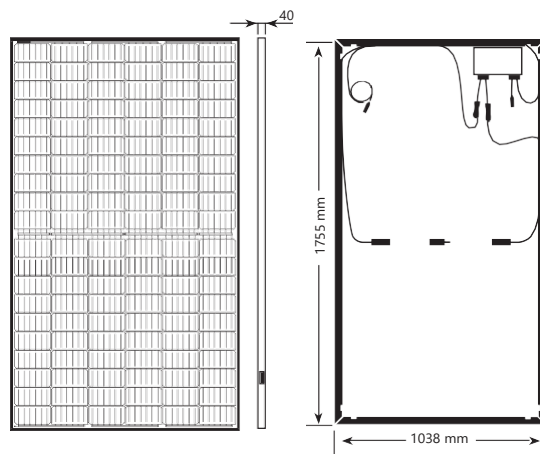

CERTIFICATIONS & WARRANTY

Module Certifications	IEC61215:2016, IEC61730:2016, AU listing CEC, Ammonia, PID, Salt-mist
Product Warranty	Power Optimizer — 25-year warranty, Module — 25-year warranty
Output Warranty of P _{max}	25-year linear module warranty ⁽³⁾

TEMPERATURE CHARACTERISTICS

	SPV355-R60DBMG / SPV360-E60DBMG	SPV370-E60DBMG	
Temperature Coefficient Power (P _m)	-0.364	-0.328	% / °C
Temperature Coefficient Voltage (V _{oc})	-0.281	-0.265	% / °C
Temperature Coefficient Current (I _{sc})	0.039	0.0487	% / °C
Operating Cell Temperature (NOCT)	45 ± 2		°C


(1) STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5

(2) NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s


(3) 1st year: 98%, 84.8% power output over 25 years

Linear Warranty

*25-Year Product Warranty
+ 25-Year Linear Power Warranty

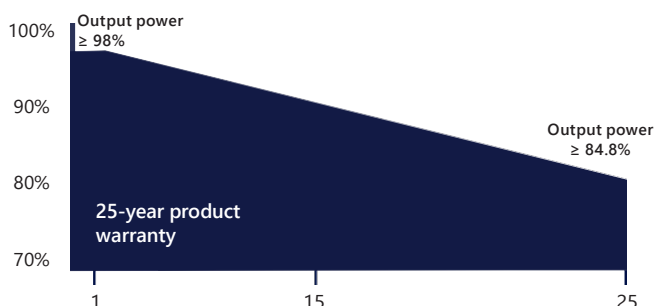

Module I-V Curve (SPV360-R60DBMG)

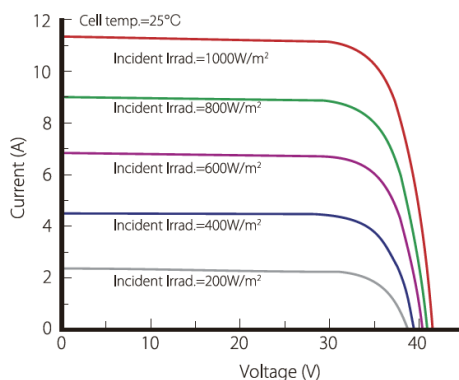

*Applicable for P/N SPV3xx-R60DBMG-6M4Cxx

Smart Module

Monocrystalline PERC Module with Half-Cut Cell Technology and Integrated Power Optimizer

SPV355-R60DBMG-6M4Cxx, SPV360-R60DBMG-6M4Cxx, SPV370-R60DBMG-6M4Cxx

POWER OPTIMIZER PROPERTIES		
INPUT		
Rated Input DC Power	440	W
Absolute Maximum Input Voltage (Voc at lowest temperature)	60	Vdc
MPPT Operating Range	8 - 60	Vdc
Maximum Short Circuit Current (Isc)	14.5	Adc
Maximum Efficiency	99.5	%
Weighted Efficiency	98.6	%
Overvoltage Category	II	
OUTPUT DURING OPERATION (POWER OPTIMIZER CONNECTED TO OPERATING SOLAREEDGE INVERTER)		
Maximum Output Current	15	Adc
Maximum Output Voltage	60	Vdc
OUTPUT DURING STANDBY (POWER OPTIMIZER DISCONNECTED FROM SOLAREEDGE INVERTER OR SOLAREEDGE INVERTER OFF)		
Safety Output Voltage per Power Optimizer	1 ± 0.1	Vdc
STANDARD COMPLIANCE		
EMC	FCC Part 15 Class B, IEC61000-6-2, IEC61000-6-3, CISPR11, EN-55011	
Safety	IEC62109-1 (class II safety), UL1741	
RoHS	Yes	
Fire Safety	VDE-AR-E 2100-712:2013-05	
INSTALLATION SPECIFICATIONS		
Output Connector	MC4	
Output Wire Length	(+) 2.3, (-) 0.10	m
Operating Temperature Range	-40 to +85	°C
Protection Rating	IP68 / NEMA6P	
Relative Humidity	0 - 100	%

PV System Design Using a SolarEdge Inverter	Single Phase HD-Wave	Single Phase	Three Phase	Three Phase for 277/480 Grid	
Minimum String Length (Power Optimizer) ⁽⁴⁾	8		16	18	
Maximum String Length (Power Optimizers)	25			50	
Maximum Power per String	5700	5250	11250 ⁽⁵⁾	12750 ⁽⁶⁾	W
Parallel Strings of Different Lengths or Orientations	Yes				

(4) Smart modules cannot be used with the SE3K three phase inverter (available in some countries; refer to the three phase inverter SE3K-SE10K datasheet)

(5) For the 230/400V grid: it is allowed to install up to 13,500W per string when the maximum power difference between each string is 2,000W

(6) For the 277/480V grid: it is allowed to install up to 15,000W per string when the maximum power difference between each string is 2,000W

*Its not allowed to mix SPVxxx-R60DBMG-2M2Cxx and SPVxxx-R60DBMG-6M4Cxx in new installations