

## Manufacturer's Declaration for ENA EREC G100 Requirements

### 1 System Description

Huawei Export Control Solution measures the active power at the point connected to the distribution system, and then uses the information to control the inverters' export power and balance the customers demand in order to prevent the export power to the distribution system from exceeding the agreed export capacity.

In Export Limitation mode, the SmartLogger will reduce the feed-in power automatically to a value less than 5% of nominal PV system power within 5 seconds. Section 2 below describes the necessary configuration.

Export Control Solution is designed fail-safe. If the power meter or the power controller fails, or the power controller loss communication with power meter, the active power exported will be limited to the agreed export capacity or less.

### 2 Necessary configuration

Power Controller	Meter	Inverter	Max capacity
SmartLogger 3000	1) DataRefresh Delay Time $\leq 1s$ 2) Sampling accuracy $\leq 1\%$ 3) Modbus-RTU Protocol	SUN2000-8KTL SUN2000-12KTL SUN2000-17KTL SUN2000-20KTL SUN2000-33KTL-A SUN2000-36KTL SUN2000-30/36/40KTL-M3	1MW/50 inverters

**Note:**

SmartLogger3000 Supported after the firmware version SmartLogger V300R001C00SPC040.

### 3 Control Scheme

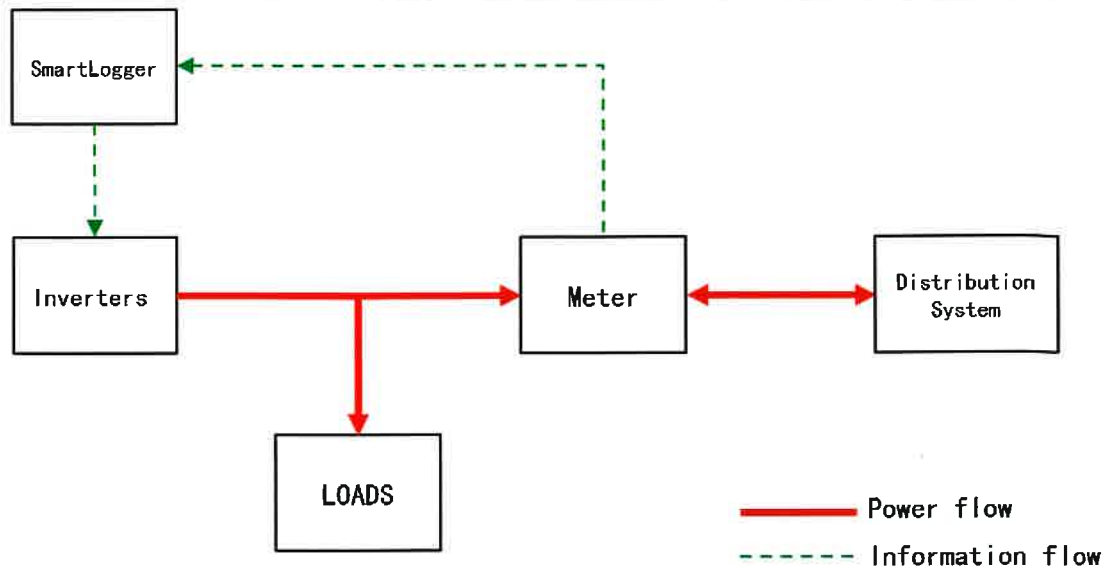


Figure 1. Control Scheme

#### 4 Control Result



Figure 2. Control Result

Huawei Technologies Co., Ltd.

Signed: 黄林 Lin Huang Date: 15/07/2024