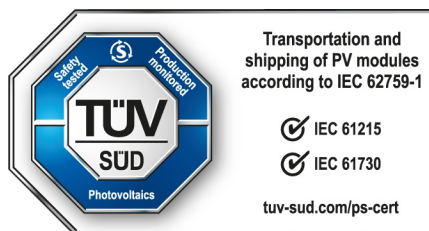Product Service

C E R T I F I C A T E

No. Z2 099333 0070 Rev. 03

Holder of Certificate: **LONGi Green Energy Technology Co., Ltd.**
No. 388, Middle Hangtian Road
Chang'an District
710100 Xi'an City, Shaanxi
PEOPLE'S REPUBLIC OF CHINA

Certification Mark:

Transportation and
shipping of PV modules
according to IEC 62759-1

TÜV SÜD
Photovoltaics

✔ IEC 61215
✔ IEC 61730

tuv-sud.com/ps-cert

Product: **Crystalline Silicon Terrestrial Photovoltaic (PV) Modules**

Mono-Crystalline Silicon Photovoltaic Module

The product was tested on a voluntary basis and complies with the essential requirements. The certification mark shown above can be affixed on the product. It is not permitted to alter the certification mark in any way. In addition, the certification holder must not transfer the certificate to third parties. This certificate is valid until the listed date, unless it is cancelled earlier. All applicable requirements of the testing and certification regulations of TÜV SÜD Group have to be complied. For details see: www.tuvsud.com/ps-cert

Test report no.: 704061802073-03

Valid until: 2026-03-18

Date, 2021-03-19

(Zhulin Zhang)

TÜV SÜD Product Service GmbH • Certification Body • Ridlerstraße 65 • 80339 Munich • Germany

TÜV®

C E R T I F I C A T E

No. Z2 099333 0070 Rev. 03

Model(s):

1500V DC system voltage modules:
LR6-72HPH-xxxM, (xxx=365 to 395 in step of 5)
LR6-72HIH-xxxM, (xxx=365 to 395 in step of 5)
LR6-60PH-xxxM, (xxx=285 to 315 in step of 5)
LR4-72HPH-xxxM, (xxx=420 to 465 in step of 5)
LR4-72HIH-xxxM, (xxx=420 to 465 in step of 5)
LR5-72HPH-xxxM, (xxx=525-555 in step of 5)
LR5-72HIH-xxxM, (xxx=525-545, in step of 5)

1000V DC system voltage modules:
LR6-72HPB-xxxM, (xxx=360 to 385 in step of 5)
LR6-60PE-xxxM, (xxx=285 to 315 in step of 5)
LR6-60PB-xxxM, (xxx=285 to 315 in step of 5)
xxx is standing for rated output power at STC

Parameters:

Fire Safety Class:	Class C according to UL790.
Safety Class:	Class II
Max. System Voltage:	1500V DC or 1000V DC
Construction:	Framed, with Junction box, cable and connector.
Modules in a complete shipping unit:	182x91 cells PV modules: 31 pcs Except for 182x91cells PV modules: 30pcs

Tested according to:

IEC 61215-1:2016
IEC 61215-1-1:2016
IEC 61215-2:2016
IEC 61730-1:2016
IEC 61730-2:2016
IEC 62759-1:2015